

**TOWN OF KESTREL FALLS – DEVELOPMENT SERVICES DEPARTMENT
SITE DEVELOPMENT PERMIT – MASTER COMMENT REPORT**



CASE NUMBER:	SDP-2026-0188C	UPDATE:	U1
REVISION #:	01	PHONE #:	(555) 741-3300
CASE MANAGER:	Priya Raman	EMAIL:	p.raman@kestrelfallstx.gov
PROJECT NAME:	Ridgeline Commons – Phase II		
LOCATION:	4420 QUARRY BEND PKWY (Tract 3, Kestrel Falls Business Park)		
SUBMITTAL DATE:	May 26, 2026		
REPORT DUE DATE:	June 24, 2026		
FINAL REPORT DATE:	July 2, 2026		
	6 DAYS HAVE BEEN ADDED TO THE UPDATE DEADLINE		

STAFF REPORT:

This report includes all staff comments received to date concerning your most recent site development permit submittal. The comments may include requirements, recommendations, or information. The requirements in this report must be addressed by an updated submittal.

The site development permit will be approved when all requirements from each review discipline have been addressed. Until this happens, your application is considered disapproved. Additional comments may be generated as a result of information or design changes provided in your update.

If you have any questions, problems, concerns, or if you require additional information about this report, please do not hesitate to contact your case manager at the phone number listed above or by writing to the Town of Kestrel Falls, Development Services Department, P.O. Box 4477, Kestrel Falls, TX 78654.

UPDATE DEADLINE (LDC 25-5-113):

It is the responsibility of the applicant or their agent to update this application. **The final update to clear all comments must be submitted by the update deadline, which is February 17, 2027.** Otherwise, the application will automatically be denied. If this date falls on a weekend or Town holiday, the next Town workday will be the deadline.

UPDATE SUBMITTALS:

A formal update submittal is required. Please bring a copy of this report with you upon submittal to Intake.

Updates may be submitted between the hours of 8:30 am and 4:00 pm. Updates submitted after 3 pm may be processed on the following business day.

Please submit 9 copies of the plans and 11 copies of a letter that address each comment for distribution to the following reviewers. Clearly label information or packets with the reviewer's name if intended for a specific reviewer.

No distribution is required for the Planner 1 and only the letter is required for Kestrel Falls Water Utility.

Please note: if Water Utility rejects a plan on Update 2, a fee is due at or before resubmittal. Contact Intake for the fee amount.

REVIEWERS:

Planner 1 : Devon Aguirre	Site Plan Plumbing : Curtis Nwosu
Transportation Engineering : Hal Brentwood	Transportation Planning : Adaeze Fiske
Drainage Engineering : Lorna Kaufhold	KFWU Development Services : Bradley Barron
Town Arborist : Susannah DeRoches	Water Quality : Lorna Kaufhold
Environmental : Jonathan Garner	Wetlands Biologist : Staryn J. Wagner
Fire For Site Plan : Marvin Lewis	KFWU Pipeline Engineering : Larry Williams
Industrial Waste : Jaime Cardenas	Electric Review : Andrea Katz
Parks / Planning & Design : Justin Stewart	Site Plan : Priya Raman

Electric Review - Andrea Katz - 555-322-6957

No Review Required. Out of Kestrel Falls Electric service area; site is served by Bluestem Electric Cooperative, Inc.

Transportation Engineering Review - Hal Brentwood - 555-741-2426

- TE 1. Per Ordinance No. 20240415-092, off-site transportation improvements and mitigations may be required. Please pay the mitigation review fee so that Development Engineer Nazlie Saeedi may conduct her mitigation assessment. **This comment was carried forward from Update 0 and remains unresolved.**
- TE 2. The KFMP requires 78' of right-of-way for a new road, the Quarry Bend – Ridgeline Connector, to be located within or along the eastern property edge. Dedicate 39 feet of right-of-way from the future centerline in accordance with the KFMP (LDC 25-6-55). Provide a street deed showing right-of-way to be dedicated to the DSD transportation reviewer for processing through Town legal.
- TE 3. Driveways must be separated from intersection right-of-way lines by 100 feet or 60 percent of the parcel frontage, whichever is less. TCM, 5.3.1.J. This distance is measured at the property line from the edge of the driveway to the extension of the right-of-way lines. See Fig. 5-2, TCM. The southern driveway shown on Sheet C-3.02 is separated by 71 feet and does not comply.
- TE 4. Transportation Engineering will make additional comments if any waivers are requested through DSD transportation reviewer.

Drainage Engineering Review - Lorna Kaufhold - 555-741-3088

- DE 1. Provide an electronic copy of the drainage model with next update to demonstrate compliance with DCM 1.2.2.D.
- DE 2. Provide details for the culvert and headwalls in the ROW at the site's driveway entrance.
- DE 3. The detention pond outfall structure summary table on Sheet C-6.01 does not match the values in the submitted model. Reconcile the following and revise whichever document is in error:

Parameter	Sheet C-6.01	Model (RIDGELINE_P2.hcp)	Status
Weir crest elev.	742.50	742.20	Discrepancy
Orifice dia.	18"	18"	OK
2-yr WSEL	744.11	744.63	Discrepancy
100-yr WSEL	747.88	747.88	OK
Freeboard	1.12 ft	0.60 ft	Does not meet 1.0 ft min.

- DE 4. Demonstrate compliance with all applicable DCM 1.2.4.E requirements.

Environmental Review - Jonathan Garner - 555-741-1665

COVER SHEET NOTES

- EV 1 Add the following note to the plan set coversheet: *"If at any time during construction of this project an underground storage tank (UST) is found, construction in that area must stop until a Town of Kestrel Falls UST Construction Permit is applied for and approved. Any UST removal work must be conducted by an Environmental Contractor that is registered with the Texas Commission on Environmental Quality (TCEQ). Contact Bruce Calder at (555) 741-2922 if you have any questions. [KF Title 6]"*

IMPERVIOUS COVER COMMENTS

- EV 2 Remove the ECM Appendix Q1 table in the plan set. In suburban watersheds impervious cover calculations are based on gross site area. [LDC 25-8-391, 25-8-392]

- EV 3 Revise the ECM Appendix Q2 table in the plan set. For a commercial use project in a suburban watershed within the zoning jurisdiction, the maximum allowable impervious cover is 80 percent, based on gross site area. The table as submitted shows 83.4 percent. [LDC 25-8-392(A)]

GRADING AND SLOPES

- EV 4 It appears grading activities are proposed with depths in excess of four feet but no more than eight feet for construction not related to the water quality or detention facilities. Provide a grading exhibit with clear, differentiating hatches or colors for the following categories:

- Grading 0 to 4.00 feet (white, or no hatch)
- Cut -4.00 to -8.00 feet
- Cut greater than -8.00 feet
- Fill 4.00 to 8.00 feet
- Fill greater than 8.00 feet

[LDC 25-8, Article 7; ECM 1.8.0] Exclude grading beneath buildings, parking garages, and public ROWs. Administrative Environmental variances may be required to proceed with the proposed grading. Additional grading review and comment may be pending.

- EV 5 This comment is pending the need for Administrative Environmental variances for cut and/or fill of not more than eight feet in the desired development zone.

ESC REQUIREMENTS [LDC 25-7-61, 65, 25-8-181,182,183,184]


- EV 6 Show and label the location of the concrete washout in the plan set.
- EV 7 The limits of construction shown on Sheet C-2.00 do not close on the north side of the property and appear to omit the temporary construction easement recorded in Doc. No. 2024-0119887. Revise.

FEES AND ESC FISCAL SURETY [LDC 25-1-82, 25-7-65, 25-8-234]

- EV 8 Provide payment of the landscape inspection fee prior to permit/site plan approval. Obtain the invoice by contacting KF Intake at LURIntake@kestrelfallstx.gov. This comment will clear by providing a receipt of payment to the Environmental Reviewer.
- EV 9 Provide payment of the site plan environmental inspection fee prior to permit/site plan approval. Obtain the invoice by contacting KF Intake at LURIntake@kestrelfallstx.gov. This comment will clear by providing a receipt of payment to the Environmental Reviewer.
- EV 10 After all ESC comments are cleared, provide a fiscal estimate for erosion/sedimentation controls and revegetation based on ECM Appendix S-1. For sites with a limit of construction greater than one acre, the fiscal estimate must include a \$3000 per acre of LOC clean-up fee. The approved amount must be posted with the Town prior to permit/site plan approval. [LDC 25-8-186, ECM 1.2.1, ECM Appendix S-1]

LANDSCAPE REQUIREMENTS (LDC 25-2-981 – 25-2-1008; ECM SECTION 2)

- EV 11 Revise the graphic delineation of the street yard area on the Landscape Plan, as shown in the below image. [LDC Section 25-2-1003, ECM 2.4.1]

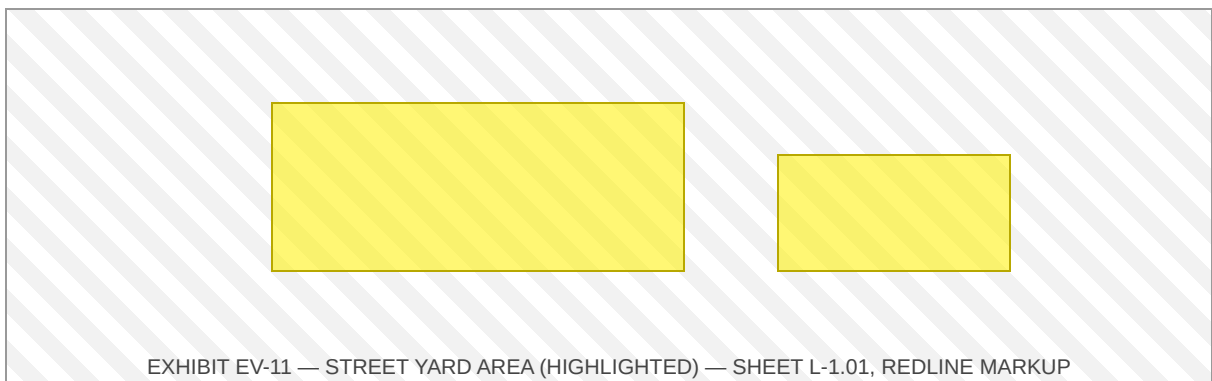

- EV 12 In addition to comment EV 11, revise the landscape ECM Appendix C calculations and provide additional required landscape where needed, including revising the innovative stormwater management area. Additional review and comments are pending.
- EV 13 Water quality / detention ponds must be screened from the ROW. Provide additional landscape screening in accordance with ECM 2.9.1. [LDC 25-2-1006]

Fire For Site Plan Review - Marvin Lewis - 555-741-0219

- F1. The data in both of the KFFD Fire Analysis tables on the cover page is incorrect. For the Amenity Building the Required fire flow for a Type 5A building of 1500 SqFt. Is 1500 GPM, the calculated fire flow (from the fire flow test) is 6007 GPM and the minimum fire flow will be 1500 GPM. Please remove the "13R" after Fully Automatic Sprinklered from this table as no AS System is required for this building.
- For the Retail Building the Required fire flow for a Type 5A building of 1500 SqFt. Is 3250 GPM, the calculated fire flow (from the fire flow test) is 6007 GPM and the minimum fire flow will be 1500 GPM.
- F2. The KFWU Information Table on Page 5 is also not correct. Available Fire Flow at 20 PSI is 6007 GPM, Reduced Fire Flow would be 812.5 GPM and the Minimum Fire Flow is 1500 GPM. Please correct this table as well.
- F3. Aerial apparatus access is required for the Retail Building (height exceeds 30 feet above the lowest level of fire department vehicle access). The access road shown along the south elevation is 22 feet wide; a minimum 26 feet is required and it must be positioned a minimum of 15 feet and a maximum of 30 feet from the building. IFC D105.

Industrial Waste Review - Jaime Cardenas - 555-972-1073

- IW1. On the Existing Conditions sheet, the existing wastewater line is labeled with WW and on the legend existing wastewater lines are represented as SS. Also, the legend represents existing wastewater manholes with a WW; however, on the existing conditions and demolition plan sheet, the existing Town of Kestrel Falls wastewater manhole is represented with an S. For consistency, please revise the plan set and the legend to ensure that the existing wastewater lines and existing manholes are represented using WW.
- IW2. A grease interceptor sizing calculation is required for the proposed restaurant tenant space (Suite 140). Submit calculations per KF Utility Criteria Manual 3.4.3. Note that a 1,000 gallon minimum applies regardless of calculated volume.

Water Quality Review - Lorna Kaufhold - 555-741-3088

- WQ1. The water quality volume calculation on Sheet C-6.02 uses a runoff coefficient of 0.72. Per ECM 1.6.7, use the coefficient derived from the proposed impervious cover of the contributing drainage area. Revise the calculation and the resulting required volume.
- WQ2. The biofiltration pond planting plan does not identify the plant species or quantities within the filtration media area. Provide a planting schedule meeting ECM Appendix P. **Informational:** plantings must be established prior to acceptance of the water quality facility.

Town Arborist Review - Susannah DeRoches - 555-741-1876

- Tree #114 (28" Live Oak) and Tree #117 (31" Post Oak) are shown as removed. Both are Heritage trees. A Heritage tree removal requires an administrative variance approved by the Town Arborist prior to site plan approval. Submit the variance application and an arborist report addressing the criteria in LDC 25-8-643.
- Half critical root zone (1/2 CRZ) impacts exceed 25% for Trees #102, #103, #109 and #121. Show mitigation and revise the tree table.
- Tree protection fencing detail is missing from the plan set. Add ECM Standard Detail 610S-1.

Transportation Planning Review - Adaeze Fiske - 555-741-7014

Reviewed and approved. No comments at this time.

Wetlands Biologist Review - Staryn J. Wagner - 555-741-3341

- WB1. A Critical Environmental Feature (CEF) — a wetland — was identified during the field visit conducted June 11, 2026, near the northeast corner of the tract. This feature was not shown on the submitted plans. Field-locate and show the CEF and its 150-foot setback on all applicable sheets. [LDC 25-8-281; ECM 1.6.8]
- WB2. The proposed storm outfall shown at Sta. 12+40 discharges within the CEF setback described in WB1. Relocate the outfall or apply for a variance under LDC 25-8-41. Additional comments will follow once the CEF is shown.

KFWU Development Services Review - Bradley Barron - 555-972-0044

- AW1. A Service Extension Request (SER) is required for wastewater service to this tract. Application No. SER-2026-0411 was received but is incomplete; the required exhibit showing the point of connection has not been provided.
- AW2. Water and wastewater easements must be dedicated by separate instrument prior to site plan approval. Provide draft instruments for review. Minimum easement width is 15 feet for a single utility and 20 feet where water and wastewater are co-located.
- AW3. **Informational only – no response required.** Meter sizing will be verified at the time of tap application. The domestic meter shown (2") may be revised based on the final fixture unit count.

Site Plan Review - Priya Raman - 555-741-3300

- SP 1 The setback line shown along the west property line is labeled 10 feet. The property is zoned LI-PDA and Ordinance No. 20211118-041 (the PDA ordinance) establishes a 25-foot setback along this boundary. Revise all sheets.
- SP 2 Parking provided (168 spaces) exceeds the maximum permitted by 22 spaces under LDC 25-6, Appendix A, as amended. Reduce the parking count or convert the excess to landscaped area. See also EV 3 — a reduction here may resolve the impervious cover exceedance.
- SP 3 Sheets C-3.01 and A-1.01 show different building footprints for Building B. Coordinate the drawing set.
- SP 4 The following items must be submitted before this application can be approved, in addition to clearing the comments above:
- Recorded plat or evidence of plat exemption for Tract 3
 - Executed Restrictive Covenant per Ordinance No. 20211118-041, Part 4
 - Fiscal surety per EV 10
 - Traffic Impact Analysis determination letter (see TE 1)

END OF MASTER COMMENT REPORT — SDP-2026-0188C, UPDATE U1. Total comments this cycle: 40. Comments carried forward from U0: 6. This report was generated July 2, 2026 and supersedes all prior correspondence for this update cycle.